

DATA SHEET

TTZ-500 and TTZ-100 Hexagonal Ferrites

Applications

- Antenna, absorber, and inductor applications for military and commercial markets

Features

- Co₂Z:K (TTZ-500)
 - Highest frequency resonance on any Z-phase material in the market.
 - Designed for 500 MHz antenna applications.
- (Zn,Co)₂Z (TTZ-100)
 - Designed for 100 MHz antenna applications.

Introduction

The TTZ-100 is a composition based on the Z-type hexagonal ferrite material with permeability (μ') >13 and a magnetic Q factor (Q) (μ''/μ') >30 (at 100 MHz) that is specifically designed for antenna applications around 100 MHz. The TTZ-100 may be supplied either in powder form with custom particle sizes, or as a sintered ceramic product with dimensions up to 4-inch x 4-inch squares.

The TTZ-500 is a composition based on the Z-type hexagonal ferrite material with permeability (μ') >7 and a magnetic Q (μ''/μ') >15 (at 500 MHz) that is specifically designed for antenna applications around 500 MHz. The TTZ-500 may be supplied either in powder form with custom particle sizes, or as a sintered ceramic product in shapes with dimensions up to 4-inch x 4-inch squares.

Blends of the TTZ-100 and TTZ-500 are also available for applications in the intermediate frequency range. Although the TTZ-500 may be used for applications up to 800 MHz, the magnetic Q decreases frequency. For applications below 100 MHz, the TT1 and TT2 series of spinels would be most suitable.

Figure 1 shows a typical microstructure at 500x magnification for TTZ-500.

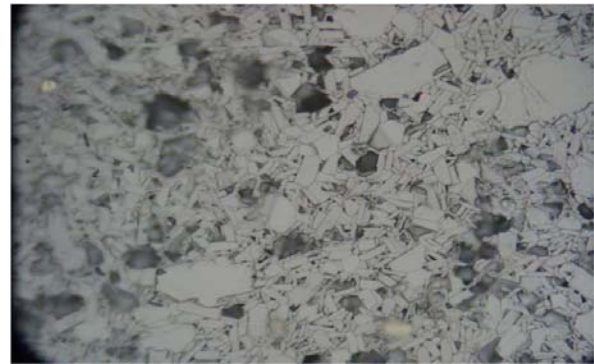


Figure 1. TTZ-500 Typical Microstructure at 500x Magnification

DATA SHEET • TTZ-500 AND TTZ-100 HEXAGONAL FERRITES

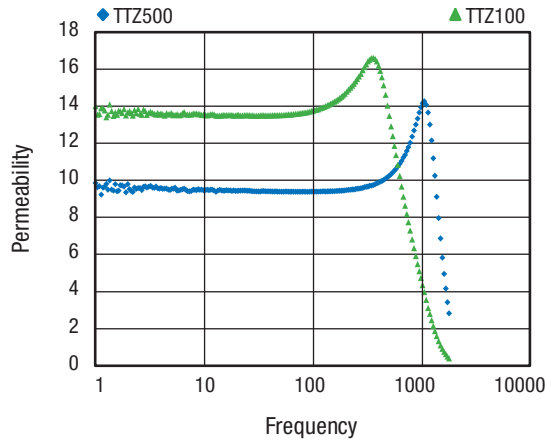


Figure 2. Permeability Spectra for TTZ-100 and TTZ-500 Materials

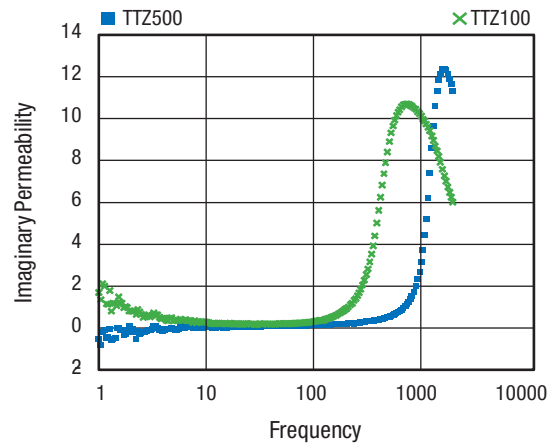


Figure 3. Imaginary Permeability for TTZ-100 and TTZ-500 Materials

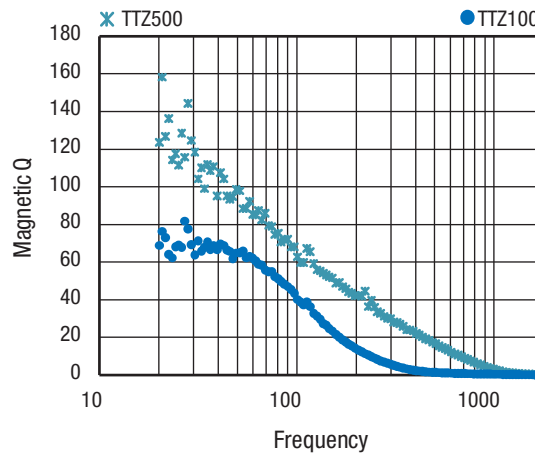


Figure 4. Magnetic Q for Typical TTZ-500 and TTZ-100 Materials

Copyright © 2013, Trans-Tech Inc., Inc. All Rights Reserved.

Information in this document is provided in connection with Trans-Tech, Inc. ("Trans-Tech"), a wholly-owned subsidiary of Skyworks Solutions, Inc. These materials, including the information contained herein, are provided by Trans-Tech as a service to its customers and may be used for informational purposes only by the customer. Trans-Tech assumes no responsibility for errors or omissions in these materials or the information contained herein. Trans-Tech may change its documentation, products, services, specifications or product descriptions at any time, without notice. Trans-Tech makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Trans-Tech assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Trans-Tech products, information or materials, except as may be provided in Trans-Tech Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS, AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY, OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. TRANS-TECH DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS, OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. TRANS-TECH SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Trans-Tech products are not intended for use in medical, lifesaving, or life-sustaining applications, or other equipment in which the failure of the Trans-Tech products could lead to personal injury, death, or physical or environmental damage. Trans-Tech customers using or selling Trans-Tech products for use in such applications do so at their own risk and agree to fully indemnify Trans-Tech for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Trans-Tech products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Trans-Tech assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Trans-Tech products outside of stated published specifications or parameters.